




ITEM: A1135

Geometry Right-hand cut
Point angle 135° with split point
Surface treatment Bright
Application High performances on stainless steel.

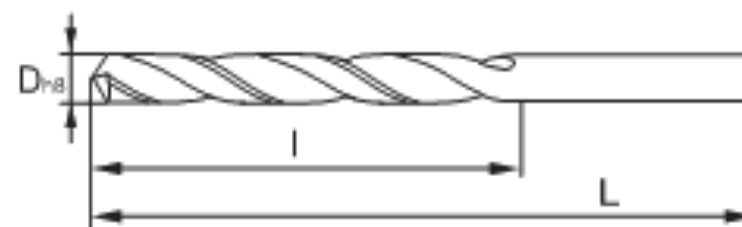

< 500	< 850	< 1200	< 600	< 850	Duplex	< 240	< 300	< 10% Si	> 10% Si	Brass Copper	Bronze >700	Ti6Al4V	HTA	< 45	< 60
●	○		●	●		○	●	○	○						

DRILL DIN 338

A1135	Tech. Code		D mm	l mm	L mm	
HEX VWR	A113501		1.00	12	34	10
	A113501,25		1.25	16	38	
	A113501,5		1.50	18	40	
	A113502		2.00	24	49	
	A113502,25		2.25	27	53	
	A113502,5		2.50	30	57	
	A113502,75		2.75	33	61	
	A113502,8		2.80			
	A113503		3.00			
	A113503,1		3.10	36	65	
	A113503,2		3.20			
	A113503,25		3.25			
	A113503,3		3.30			
	A113503,5		3.50	39	70	
	A113503,7		3.70			
	A113503,75		3.75			
	A113503,8		3.80	43	75	
	A113504		4.00			
	A113504,1		4.10			
	A113504,2		4.20			
	A113504,25		4.25	47	80	
	A113504,3		4.30			
	A113504,5		4.50			
	A113504,75		4.75	52	86	
	A113504,8		4.80			
	A113505		5.00			
	A113505,1		5.10			
	A113505,2		5.20			

A1135	Tech. Code		D mm	l mm	L mm	
HEX VWR	A113505,25		5.25	52	86	10
	A113505,5		5.50	57	93	
	A113505,7		5.70			
	A113505,75		5.75			
	A113506		6.00			
	A113506,25		6.25			
	A113506,5		6.50			
	A113506,75		6.75	69	109	
	A113506,8		6.80			
	A113507		7.00			
	A113507,25		7.25			
	A113507,5		7.50			
	A113508		8.00	75	117	
	A113508,25		8.25			
	A113508,5		8.50			
	A113509		9.00	81	125	
	A113509,1		9.10			
	A113509,5		9.50			
	A113510		10.00	87	133	
	A113510,2		10.20			
	A113510,25		10.25			
	A113510,5		10.50			
	A113511		11.00	94	142	
	A113511,5		11.50			
	A113512		12.00	101	151	
	A113512,5		12.50			
	A113513		13.00			