

MICRO DRILLS REINFORCED SHANK




ITEM: A0003

Geometry Advanced flute geometry, designed for optimal chip evacuation on a broad range of materials

Point angle 118°

Surface treatment Bright

Application Drill suited for machining on a wide range of materials.

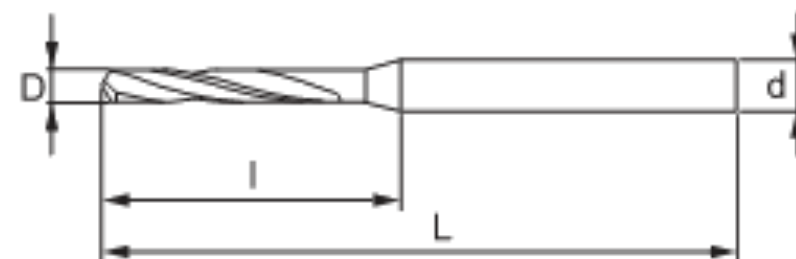

< 500	< 850	< 1200	< 600	< 850	Duplex	< 240	< 300	< 10% Si	> 10% Si	Brass Copper	Bronze > 700	Ti6Al4V	HTA	< 45	< 60
●	●	●	○	○				●	●		○				

DRILL DIN 1899A

A0003	Tech. Code		D mm	d mm	l mm	L mm	
HELIX FIR	A00030,2		0.20	3	4	38	1
	A00030,3		0.30				
	A00030,4		0.40				
	A00030,5		0.50				
	A00030,6		0.60				
	A00030,7		0.70		6		
	A00030,8		0.80				
	A00030,85		0.85		8		
	A00030,9		0.90				
	A00031		1.00				
	A00031,05		1.05				
	A00031,1		1.10				
	A00031,15		1.15				

A0003	Tech. Code		D mm	d mm	l mm	L mm	
HELIX FIR	A00031,2		1.20	3	8	38	1
	A00031,25		1.25				
	A00031,3		1.30				
	A00031,4		1.40				
	A00031,45		1.45				
	A00031,5		1.50		10		
	A00031,6		1.60				
	A00031,7		1.70				
	A00031,8		1.80				
	A00031,9		1.90				
	A00032		2.00		12		
	A00032,1		2.10				
	A00032,2		2.20				

LTEC
lubricants



Safety
High quality
Renewable

