

CA 1

90°
Angle head

Technical Data

Caractéristiques techniques / Technische Daten



	ISO-30 / DIN-2079
R.P.M max	Heavy duty bearings 3.000
	7.5 kg
	1:1
KW	7 kW
Nm max	35 Nm
Rotation	in = out

L / H

Other measures under request

Autres mesures sur demande

Weitere Maßnahmen auf Anfrage

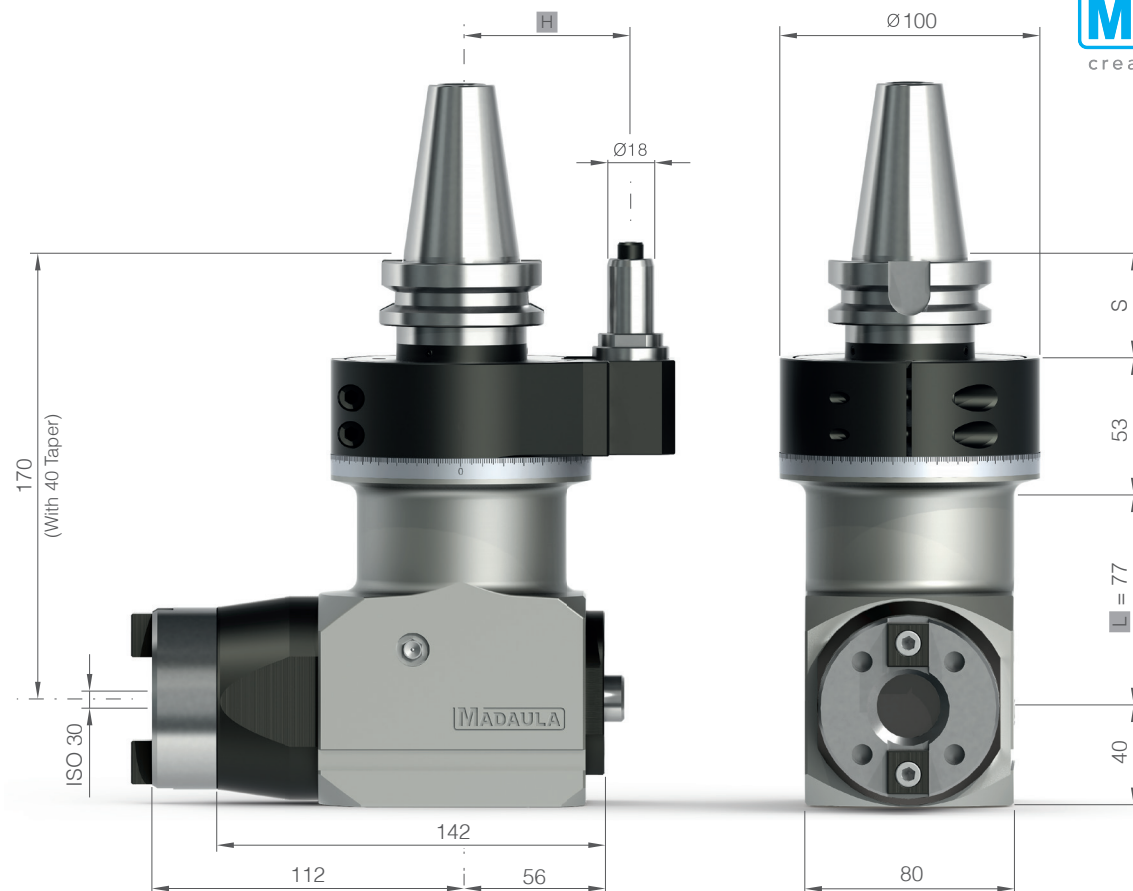


MADAULA
creative solutions

Taper Cône / Kegel	Size Taille / Größe	H	S
-----------------------	------------------------	---	---

DIN 69871 / 2080	40/50	65/80	40
CAT	40/50	65/80	40
MAS-BT	40/50	65/80	40/50
HSK	63/100	65/80	40/50
CAPTO	C6/C8	65/80	40/50
KM	63/100	65/80	40/50

Standard Equipment
Standard / Standard



Optional Equipment
Optionel / Option

Stop Block
Bloc d'arrêt / Anschlag-Block

See page 55 

Collets
Pincers / Spannzangen

See page 56 

Coolant through index pin
Arrosage par le doigt d'indexage / Kühlmittelzufuhr durch bolzen

bar/psi max 12/175

High speed option RPM max
Haute vitesse en option RPM / Hochgeschwindigkeit optional UPM max

6.000