

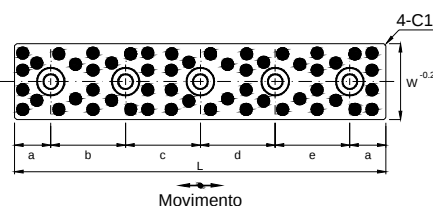



A08.LP



TIPO A

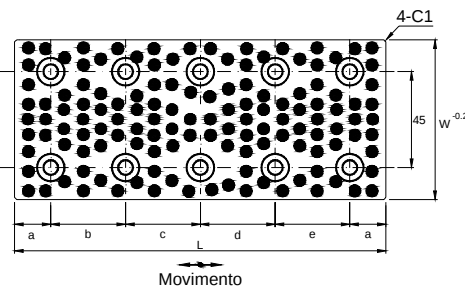

TIPO B



TIPO C

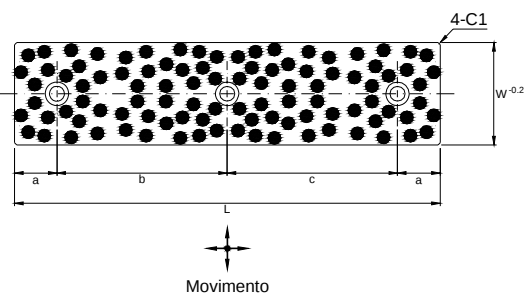

Bronze - DIN CuZn25A15 + Grafite lubrificante

Tipo	Quantidade		Distância Entre Furos					L	W	CÓDIGO
	Fix.	Dim.	a	b	c	d	e			
C	2	M6	15	45	-	-	-	75	18	A08.LP018075
			25	50	-	-	-	100		A08.LP018100
			25	75	-	-	-	125		A08.LP018125
			25	100	-	-	-	150		A08.LP018150
		M8	15	45	-	-	-	75	28	A08.LP028075
			25	50	-	-	-	100		A08.LP028100
			25	75	-	-	-	125		A08.LP028125
			25	100	-	-	-	150		A08.LP028150
A	3	M8	20	60	-	-	-	100	35	A08.LP035100
			20	55	55	-	-	150		A08.LP035150
	4		20	55	50	55	-	200		A08.LP035200
			20	70	70	70	-	250		A08.LP035250
	5		20	65	65	65	65	300		A08.LP035300
			20	80	75	75	80	350		A08.LP035350
C	2	M6	15	45	-	-	-	75	38	A08.LP038075
			25	50	-	-	-	100		A08.LP038100
			25	75	-	-	-	125		A08.LP038125
			25	100	-	-	-	150		A08.LP038150

Tipo	Quantidade		Distância Entre Furos					L	W	CÓDIGO
	Fix.	Dim.	a	b	c	d	e			
C	2	M6	15	45	-	-	-	75	48	A08.LP048075
			25	50	-	-	-	100		A08.LP048100
			25	75	-	-	-	125		A08.LP048125
			25	100	-	-	-	150		A08.LP048150
A	3	M8	20	60	-	-	-	100	50	A08.LP050100
			20	55	55	-	-	150		A08.LP050150
			20	55	50	55	-	200		A08.LP050200
			20	70	70	70	-	250		A08.LP050250
			20	65	65	65	65	300		A08.LP050300
			20	80	75	75	80	350		A08.LP050350
			20	90	90	90	90	400		A08.LP050400
B	4	M8	20	110	-	-	-	150	75	A08.LP075150
			20	80	80	-	-	200		A08.LP075200
			20	105	105	-	-	250		A08.LP075250
			20	85	90	85	-	300		A08.LP075300
			20	120	120	120	-	400		A08.LP075400
			20	115	115	115	-	500		A08.LP075500

Obs: Para pedido defina CÓDIGO.

Medidas em milímetros