


B01.

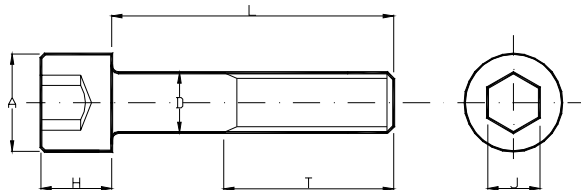

Carga de ruptura >120 Kg / mm² (>38 HRc)

MTR - ISO 4762 - DIN 912 / 12.9 - BS 4168 / 1981

L	DIÂMETRO													
	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M24	M30	M36
5														
6														
8														
10														
12														
16														
20														
25														
30														
35														
40														
45														
50														
55														
60														
65														
70														
75														
80														
90														
100														
110														
120														
130														
140														
150														
160														
180														
200														
220														
240														
260														
280														
300														
320														
340														
360														
380														
400														
Q. Caixa	100				50	25	10	5						

A Máx.	5.7	7.2	8.7	10.2	13.3	16.3	18.3	21.3	24.3	27.3	30.3	36.4	45.4	54.5
H Máx.	3	4	5	6	8	10	12	14	16	18	20	24	30	36
T Mín.	18	20	22	24	28	32	36	40	44	48	52	60	72	84
Passo	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	3	3.5	4
J	2.5	3	4	5	6	8	10	12	14	14	17	19	22	27

Obs: Para pedido defina B01.DIÂMETRO x L.

Medidas em milímetros

☒ STOCKREROM ☐ Sob consulta à fábrica