


B10.

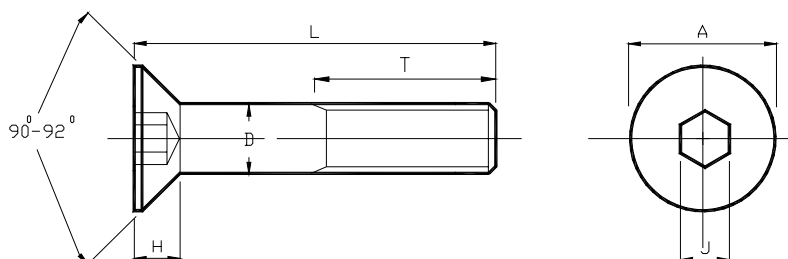

Carga de ruptura - 100 Kg / mm² (>36 HRc)

MTR - DIN 7991 / 10.9 - BS 4168 / 1982

L	DIÂMETRO								
	M3	M4	M5	M6	M8	M10	M12	M16	M20
8									
10									
12									
16									
20									
25									
30									
35									
40									
45									
50									
60									
Q. caixa	200					100	50		25

A	6.00	8.00	10.00	12.00	16.00	20.00	24.00	30.00	36.00
A Mín.	5.82	7.78	9.78	11.73	15.73	19.67	23.67	29.67	35.61
H Máx.	1.86	2.48	3.10	3.72	4.96	6.20	7.44	8.80	8.50
T Ref.	18	20	22	24	28	32	36	44	52
Passo	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2.5
J	2	2.5	3	4	5	6	8	10	12

Obs: Para pedido defina B10. DIÂMETRO x L.

Medidas em milímetros