

## ALPA\\ DIGITAL DEPTH CALIPERS WITH MOBILE BRIDGE IP67

MEGAline



ITEM: AA064

0,01mm resolution - Swiss technology with data output and protection IP67. (full submersion) also cable connected. Automatic power on, by moving the vernier along its rod. (SIS system) pausing after 20 min when not in use, pause setting kept stored with max movement speed of 2.5 m/sec. Structure mechanics in tempered, rectified stainless steel with interchangeable plungers pull/push on the same floor, block screw and double hook. Provided with wooden case.

Tech. Code	Measuring range mm	A mm	B mm
D0103300	0 + 300	410	12 x 4
D0103400	0 + 400	510	
D0103500	0 + 500	610	
D0103600	0 + 600	710	
D0103800	0 + 800	910	
D01031000	0 + 1000	1110	

Tech. Code	Model
D99113V	Battery 3V DL2032 - CR2032
D0002USB	Connection cable Proximity-USB
D0002RS232	Proximity -cable RS232

## ALPA\\ MOVABLE BRIDGES




ITEM: ACC08

Movable bridge for mounting depth caliper code D0103.

Tech. Code	A mm	Weight g
D0112400	400	0.570
D0112500	500	0.690
D0112600	600	0.830

ON-LINE  
MANUAL

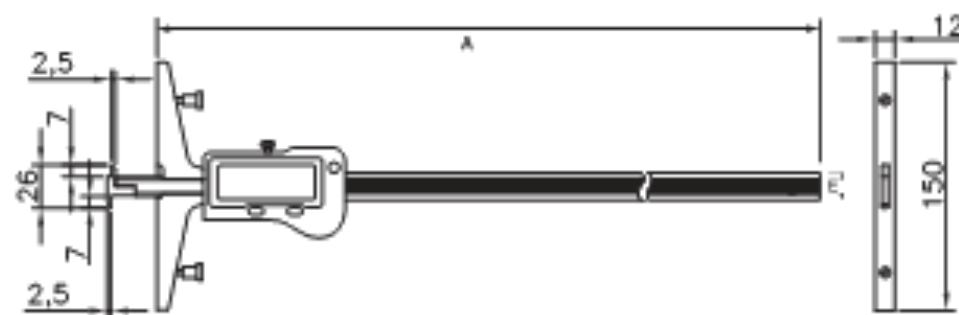

## ALPA\\ SMALL HOLES DEPTH DIGITAL CALIPERS IP67

MEGAline



ITEM: AA083

0,01mm resolution - Swiss technology with data output and protection IP67. (full submersion) also cable connected. Automatic power on, by moving the vernier along its rod. (SIS system) pausing after 20 min when not in use, pause setting kept stored with max movement speed of 2.5 m/sec. Structure mechanics in tempered, rectified stainless steel. Hole diameter minimum from 6 mm. Provided with wooden case.

Tech. Code	Measuring range mm	A mm	Bar section mm	Pin mm
D0111120	0 + 120	220	4	7,8 x 0,9
D0111120S				5,8 x 0,6

Tech. Code	Model
D99113V	Battery 3V DL2032 - CR2032
D0002USB	Connection cable Proximity-USB
D0002RS232	Proximity -cable RS232

ON-LINE  
MANUAL

