


B21.

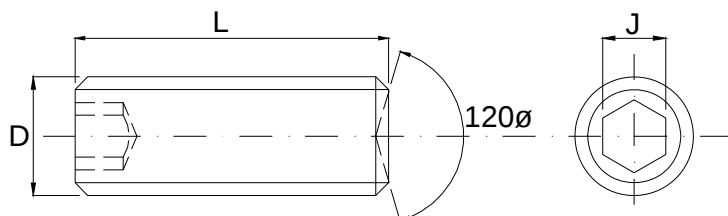

Carga de ruptura - 100 Kg / mm² (> 45 HRc)

BSW Cup point - BS2470 / 1973

L	DIÂMETRO								
	1/8	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4
1/8									
3/16									
1/4									
5/16									
3/8									
7/16									
1/2									
5/8									
3/4									
7/8									
1									
1 1/4									
1 1/2									
1 3/4									
2									
2 1/2									
3									
Qt.Caixa	200					100	50	25	

Passo	40	24	20	18	16	14	12	11	10
J	1/16	3/32	1/8	5/32	3/16	7/32	1/4	5/16	3/8

Obs: Para pedido defina B21. DIÂMETRO x L.

Medidas em polegadas

Para pedido 1/2-13 UNC, especifique B22. 1/2 x L.

À exceção do diâmetro de 1/2" BSW, todas as medidas são equivalentes à norma UNC. Assim, os diâmetros de 1/8" e 3/16" são equivalentes ao N°5-40 e N°10-24 UNC, respectivamente.

 STOCKREROM

moldes