

## ALPA\ ZERO-CENTRAL DIAL INDICATORS 0.001



ITEM: CB025

Zero central dial gauge, high accuracy and sensibility dial gauge.  
Resolution 0.001, maximum effective range  $\pm 0.5$  mm, total measuring travel 3 mm, upper screw for zero adjustment, jewelled mechanism, shockproof, according to DIN 879 standard, for measurements of gauging force equal to N1, stem movement on spheres provided with mechanical cable lifter.

Tech. Code	Excursion mm	Accuracy $\mu\text{m}$
D23581	0.05	1


## ALPA\ DIAL INDICATORS Ø 40



ITEM: CB006

Travel 5 mm. Accuracy according to UNI 4180. Stainless Steel rod and shaft, Ø 8 mm cylindrical stem.

Tech. Code	Excursion mm	Resolution mm	A mm	B mm
D23525	5	0.01	28.6	48.5

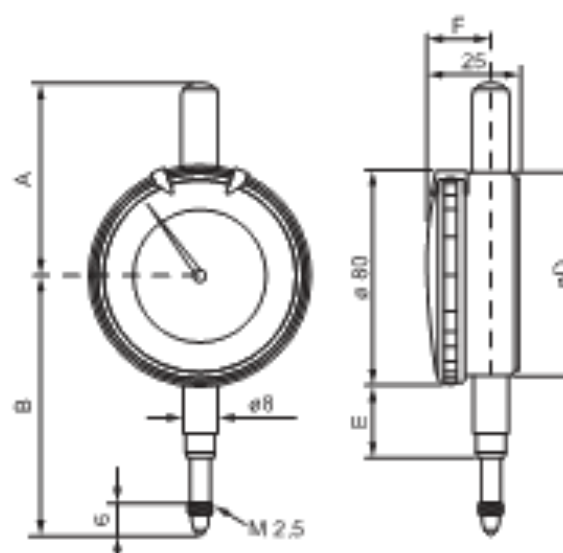


## DIAL INDICATORS Ø 40



ITEM: SERIE 1

Metric model in compact size, dial Ø 40 mm, Stainless Steel rod and shaft, cylindrical mount Ø 8. accuracy according to DIN 878.

Tech. Code	Excursion mm	A mm	B mm	C mm	D mm	F mm	G mm	I mm
D23655	0 ÷ 5	32,5	47,5	40	14,5	13,8	13,7	6,6

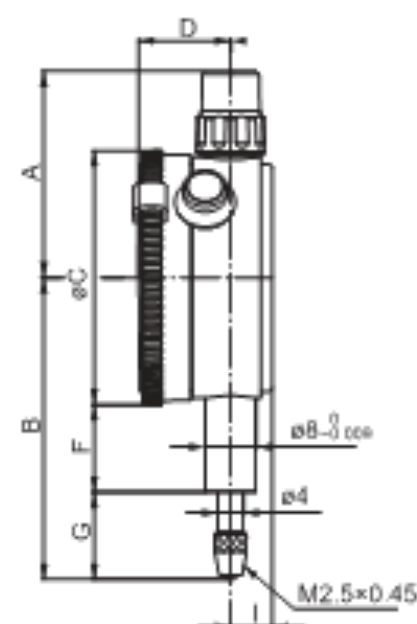

## ALPA\ DIAL INDICATORS Ø 58



ITEM: CB005

Shock-proof mechanism (only for D235110), accuracy according to UNI4180, stainless steel rod and shaft, Ø 8mm cylindrical mount.

Tech. Code	Excursion mm	Resolution mm	A mm	B mm
D235110	10	0.01	42.8	68.5
D235125	25			80.9
D235130	30			

