


C40.A

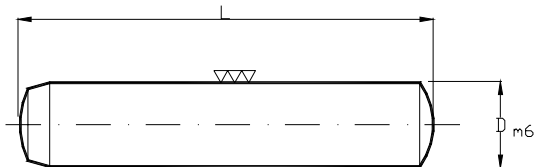

DIN 6325 - Ra 0.40 máximo


100Cr6 - Cementado 58-62HRc

L	DIÂMETRO								
	3	4	5	6	8	10	12	16	20
12									
16									
20									
24									
28									
32									
40									
50									
60									
70									
80									
100									
120									

OBS: Para pedido defina C40.A DIÂMETRO X L.

Medidas em milímetros

C40.B

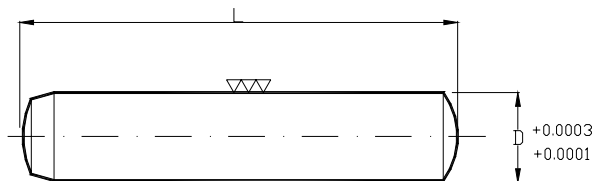

ANSI B.18.8.2

Cementado 60-64HRc

L	DIÂMETRO							
	1/8	3/16	1/4	5/16	3/8	1/2	5/8	3/4
3/4								
1								
1 1/2								
2								
2 1/2								
3								
3 1/2								
4								
5								

OBS: Para pedido defina C40.B DIÂMETRO X L.

Medidas em polegadas

 STOCK REROM