


## POWER CHUCKS MAS 403 BT AD+B

ITEM: C1026

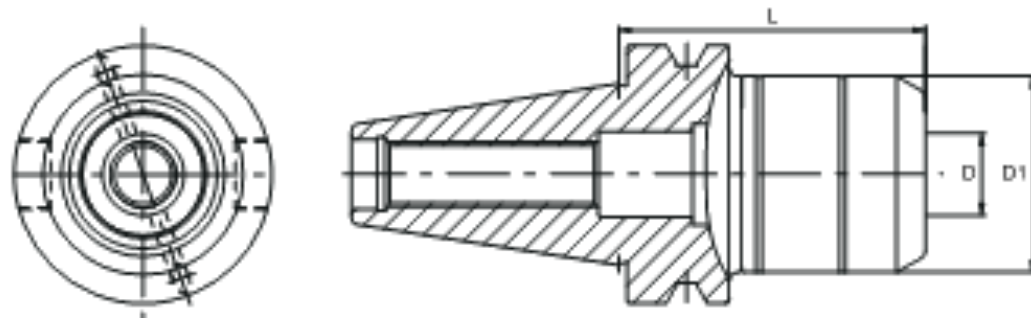

|            |            |
|------------|------------|
| G2.5       | G2.5       |
| 25.000 rpm | 25.000 rpm |

| Tech. Code | BT | D<br>mm | L<br>mm | D1<br>mm |
|------------|----|---------|---------|----------|
| C102642075 | 40 | 20      | 75      | 48       |
| C102643290 |    | 32      | 90      | 68       |
| C102652090 | 50 | 20      | 90      | 48       |
| C102653295 |    | 32      | 95      | 68       |


- WRENCHES F.S. page C.79

- COLLETS FS page C.71

- PULL STUDS page C.76

## TUKOY POWER CHUCKS MAS 403 BT AD

ITEM: C1022

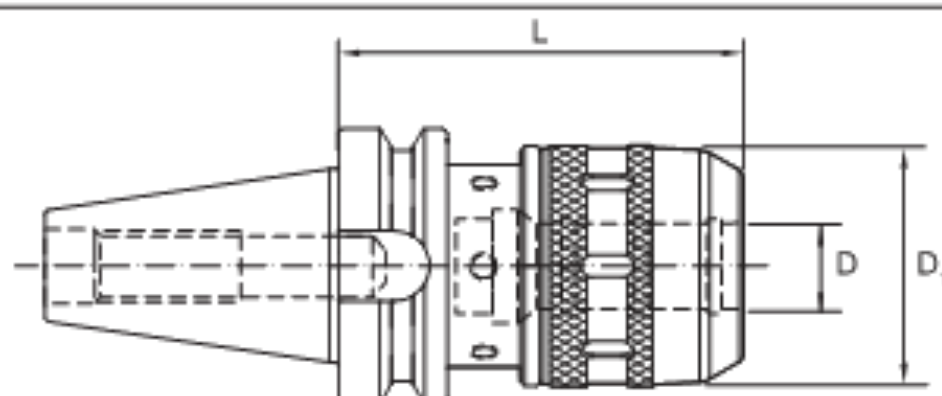

|            |            |
|------------|------------|
| G6.3       | G6.3       |
| 12.000 rpm | 12.000 rpm |

| Tech. Code  | BT | D<br>mm | L<br>mm | D1<br>mm |
|-------------|----|---------|---------|----------|
| C1022420105 | 40 | 20      | 105     | 54       |
| C1022432105 |    | 32      |         | 72       |
| C1022532105 | 50 | 32      | 105     | 72       |

Extremely high clamping force and stability. No axial movement of the shank tool during making. Extended tool life.

- COLLETS FS page C.71

- WRENCHES F.S. page C.79

- PULL STUDS page C.76