


B20.

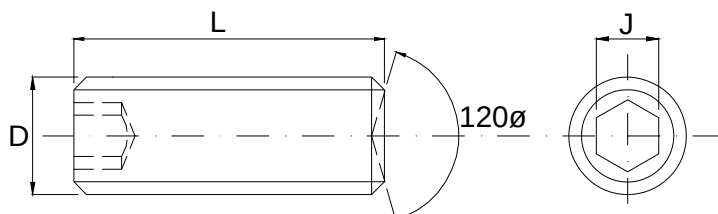

Carga de ruptura - 100 Kg / mm² (> 45 HRc)

MTR Cup point - ISO 4029 / 1977 - DIN 916

L	DIÂMETRO								
	M3	M4	M5	M6	M8	M10	M12	M16	M20
3									
4									
5									
6									
8									
10									
12									
16									
20									
25									
30									
35									
40									
45									
50									
55									
60									
Qt.Caixa	200					100		50	

Passo	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2.5
J	1.5	2	2.5	3	4	5	6	8	10

Obs: Para pedido defina B20. DIÂMETRO x L.

Medidas em milímetros